


product	tree shark	MARK
Basic parameters	King bed room	
	Construction area36.35m <sup>2</sup> Indoor area23.88 Platform area12.47	
main structure	Steel structure Q235 epoxy zinc rich primer , Fluorocarbon topcoat (including steel structure platform)	GB/CE
building construction	roof : GRG Custom Roofing , Contains 150mm rock wool insulation	Non-standard customization
	ceiling : Wood grain aluminum gusset	
	Wall: wood grain transfer thermal insulation sandwich panel, rock wool thermal insulation thickness of 100mm Indoor: wood grain bamboo and wood fiberboard, narrow board vertical paving bathroom : full tile	
	doors and windows : Broken bridge aluminum alloy double glass , steel entry door	
	Floor: indoor SPC stone plastic floor; outdoor wood plastic floor; bathroom marble paving	
	Platform railing: 5+5 curved laminated glass fence	
bathroom	Tempered glass partition、toilet、bathroom cabinet、defogger	Kohler / same grade
furniture upholstery	wardrobe、1.5m queen bed、Bedside table*2、Set of outdoor leisure seats	
Equipment and others	2P duct air conditioner side air outlet	Hisense/same grade
	Intelligent control equipment	HDL
	Electrical box、 water supply and drainage pipes	National standard/local standard
market price	The design fee is 50,000 yuan, which can be paid in one lump sum after the contract is signed, and the project payment can be deducted EXW CNY: Main building 362,000 Main building + platform 398,000 FOB CNY: main building 392,000 main building + platform 428,000 1 40-foot standard container (provisional estimate)Estimated labor on site: 5 workers 20-30 days/building	


1. The FOB price includes the packing fee, Shanghai Port
2. The platform includes steel structure platform and ground and railings, excluding platform columns and foundations.
3. The cost of anti-salt spray corrosion for seaside projects is 20,000 yuan per building
4. The price includes indoor soft decoration and bathroom. If there are special materials, the price will be calculated separately.

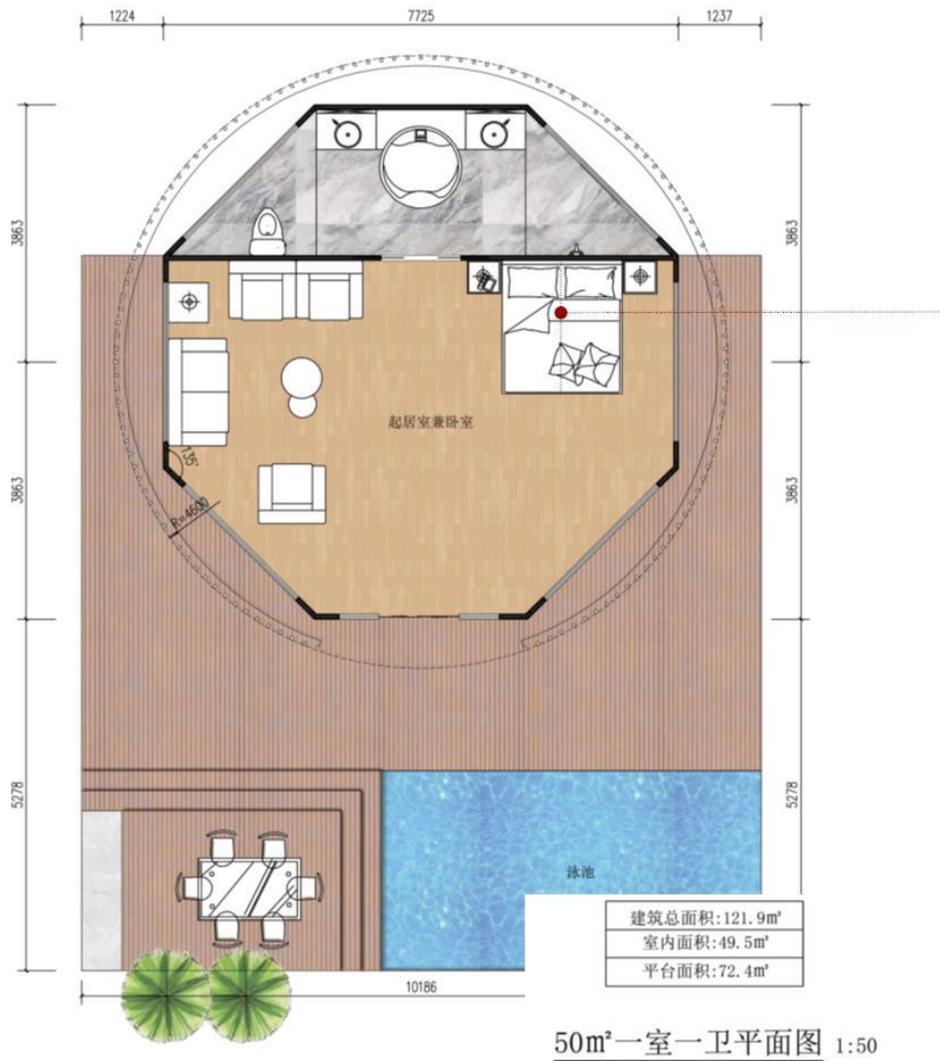

product	exquisite	MARK
Basic parameters	suite	
	Construction area 121.9m <sup>2</sup> Indoor area 49.5m <sup>2</sup> Platform area 72.4m <sup>2</sup> (excluding swimming pool)	
main structure	Steel structure Q235 epoxy zinc-rich primer, fluorocarbon topcoat (including steel structure platform)	GB/CE
building construction	Roof: PVC imitation thatch with 150mm rock wool insulation	Non-standard customization
	Ceiling: Bamboo and rattan ceiling	
	Wall: wood grain transfer thermal insulation sandwich panel, rock wool thermal insulation thickness of 100mm Shape: wood grain arc aluminum pass Indoor: dry hanging integrated decorative board bathroom : full tile	
	Doors and windows: Broken bridge aluminum alloy double glass, steel entrance door	
	Floor: indoor SPC stone plastic floor; outdoor wood plastic floor; bathroom floor tile paving	
	Platform railing: carbonized wood guardrail	
bathroom	Tempered glass partition, toilet, bathroom cabinet, defogging mirror, double basin, bathtub	Kohler / same grade
furniture upholstery	1.5m queen bed, bedside table*2, one set of indoor reception sofa, one set of outdoor leisure seats	
Equipment and others	3P duct air conditioner side air outlet	Hisense/same grade
	Intelligent control equipment	HDL
	Electric box, water supply and drainage pipes	GB/local standard
market price	The design fee is 50,000 yuan, which can be paid in one lump sum after the contract is signed, and the project payment can be deducted EXW CNY: Main building 508,000 Main building + platform 578,000 FOB CNY: Main building 546,000 Main building + platform 618,000 1 40-foot standard container (provisional estimate) Estimated labor on site: 5 workers 20-30 days/building	


1. The FOB price includes the packing fee, Shanghai Port
2. The platform includes steel structure platform and ground and railings, excluding platform columns and foundations.
3. The cost of anti-salt spray corrosion for seaside projects is 20,000 yuan per building
4. The price includes indoor soft decoration and bathroom. If there are special materials, the price will be calculated separately.

户型一

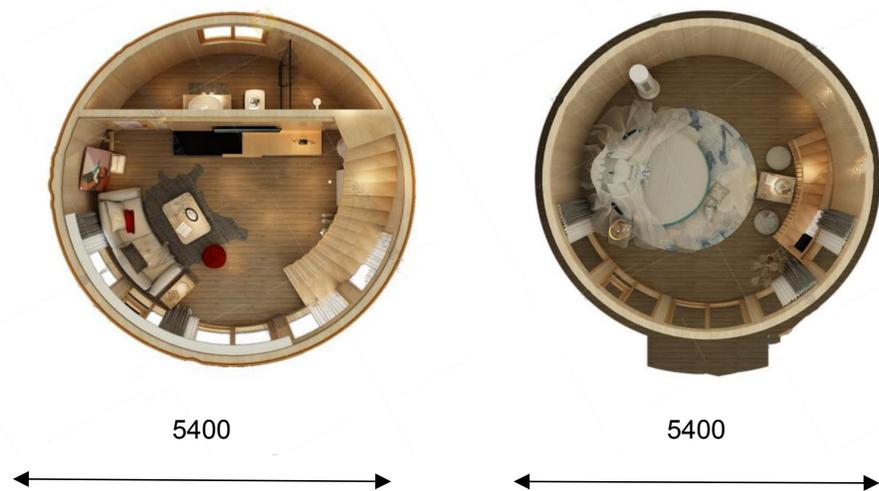

1. The FOB price includes the packing fee, Shanghai Port
2. The platform includes steel structure platform and ground and railings, excluding platform columns and foundations.
3. The cost of anti-salt spray corrosion for seaside projects is 20,000 yuan per building
4. The price includes indoor soft decoration and bathroom. If there are special materials, the price will be calculated separately.

product	exquisiteT	MARK
Basic parameters	Duplex parent-child suite	
	Construction area72m <sup>2</sup> Indoor area46m <sup>2</sup> Platform area22m <sup>2</sup>	
main structure	Steel structure Q235 epoxy zinc-rich primer, fluorocarbon topcoat (including steel structure platform)	GB/CE
building construction	Roof: PVC imitation thatch, containing 150mm rock wool insulation	Non-standard customization
	Ceiling: Bamboo and rattan ceiling	
	Wall: wood grain transfer thermal insulation sandwich panel, rock wool thermal insulation thickness 100mm Shape: wood grain arc aluminum pass Indoor: dry hanging integrated decorative board bathroom: tiled	
	Doors and windows: Broken bridge aluminum alloy double glass, steel entry door, indoor set door	
	Floor: indoor SPC stone plastic floor; outdoor wood plastic floor; bathroom floor tile paving	
	Indoor stairs: steel structure stairs, wooden steps	
	Platform railing: carbonized wood guardrail	
bathroom	Tempered glass partition, toilet, bathroom cabinet, defogging mirror, double basin	Kohler / same grade
furniture upholstery	1.5m queen bed, 1.2m queen bed, bedside table*3, writing desk, one set of indoor reception sofa, one set of outdoor leisure seats	
Equipment and others	2P*2 duct air conditioner side air outlet	Hisense/same grade
	Intelligent control equipment	DHL
	Electric box, water supply and drainage pipes	GB/local standard
market price	The design fee is 50,000 yuan, which can be paid in one lump sum after the contract is signed, and the project payment can be deducted EXW CNY: Main building 498,000 Main building + platform 526,000 FOB CNY: Main building 532,000 Main building + platform 568,000 1 40-foot standard container (provisional estimate) Estimated labor on site: 30-45 days/building for 5 workers	

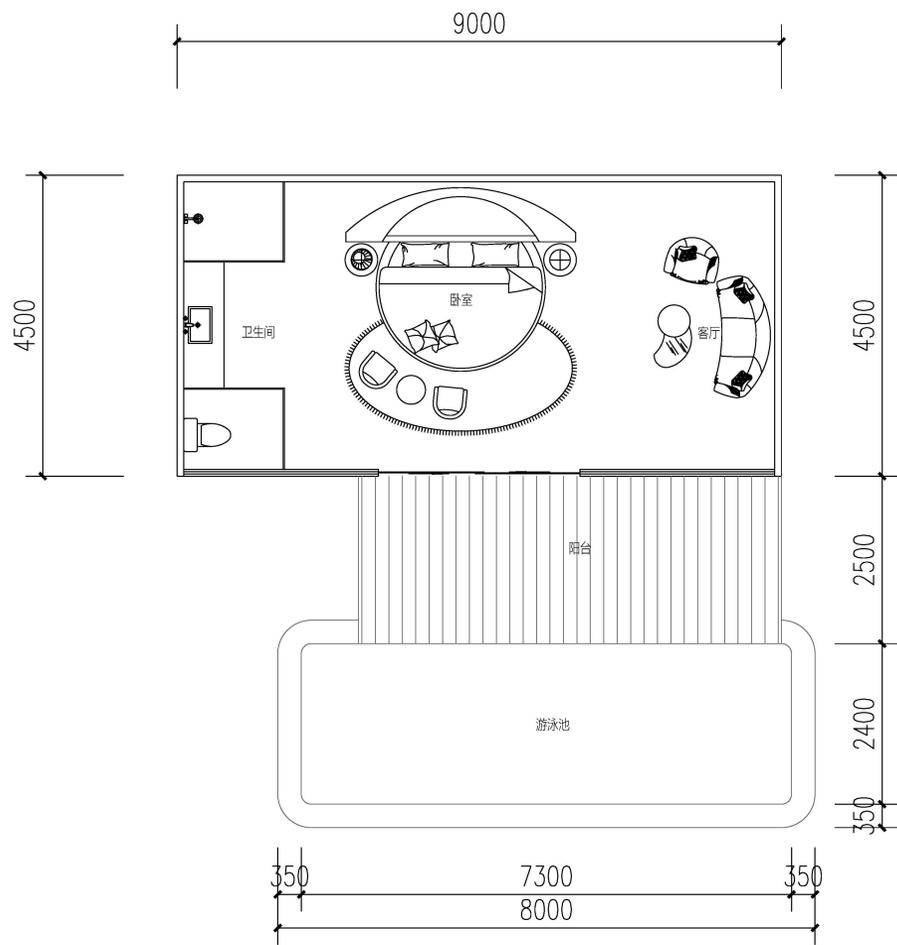


1. The FOB price includes the packing fee, Shanghai Port
2. The platform includes steel structure platform and ground and railings, excluding platform columns and foundations.
3. The cost of anti-salt spray corrosion for seaside projects is 20,000 yuan per building
4. The price includes indoor soft decoration and bathroom. If there are special materials, the price will be calculated separately.

product	Homing	MARK
Basic parameters	suite	
	Construction area58m <sup>2</sup> Indoor area40.5m <sup>2</sup> Platform area17.5m <sup>2</sup> (excluding swimming pool)	
main structure	Steel structure Q235 epoxy zinc-rich primer, fluorocarbon topcoat (including steel structure platform)	GB/CE
building construction	Roof: Bamboo-patterned aluminum strips with 150mm rock wool insulation	Non-standard customization
	Ceiling: Bamboo and rattan ceiling	
	Wall: wood grain transfer thermal insulation sandwich panel, rock wool thermal insulation thickness 100mm Shape: Bamboo pattern aluminum strip Indoor: dry hanging integrated decorative board bathroom: tiled	
	Doors and windows: Broken bridge aluminum alloy double glass, steel entry door, indoor set door	
	Floor: indoor SPC stone plastic floor; outdoor wood plastic floor; bathroom floor tile paving	
	Platform railing: carbonized wood guardrail	
bathroom	Tempered glass partition, toilet, bathroom cabinet, defogging mirror, washbasin	Kohler / same grade
furniture upholstery	1.5m queen bed, bedside table*2, one set of indoor reception sofa, one set of outdoor leisure seats	
Equipment and others	3P duct air conditioner side air outlet	Hisense/same grade
	Intelligent control equipment	DHL
	Electric box, water supply and drainage pipes	GB/local standard
market price	The design fee is 50,000 yuan, which can be paid in one lump sum after the contract is signed, and the project payment can be deducted EXW CNY: Main building 372,000 Main building + platform 388,000 FOB CNY: Main building 412,000 Main building + platform 428,000 1 40-foot standard container (provisional estimate) Estimated labor on site: 5 workers 25-35 days/building	



product	Lin Su	MARK
Basic parameters	suite	
	Construction area34.26m <sup>2</sup> Indoor area28.26m <sup>2</sup> Platform area6m <sup>2</sup>	
main structure	Steel structure Q235 epoxy zinc-rich primer, fluorocarbon topcoat (including steel structure platform and stairs)	GB/CE
building construction	Roof: PVC thatched roof with 150mm rock wool insulation	Non-standard customization
	Ceiling: Bamboo and rattan ceiling	
	Wall: wood grain transfer thermal insulation sandwich panel, rock wool thermal insulation thickness 100mm Shape: wood grain aluminum Indoor: dry hanging integrated decorative board bathroom: tiled	
	Doors and windows: Broken bridge aluminum alloy double glass, steel entry door, indoor set door	
	Floor: indoor SPC stone plastic floor; outdoor wood plastic floor; bathroom floor tile paving	
	Platform railing: carbonized wood guardrail	
bathroom	Tempered glass partition, toilet, bathroom cabinet, defogging mirror, washbasin	Kohler / same grade
furniture upholstery	1.5m large bed, bedside table*2, a set of indoor reception sofa	
Equipment and others	3P duct air conditioner side air outlet	Hisense/same grade
	Intelligent control equipment	DHL
	Electric box, water supply and drainage pipes	GB/local standard
market price	The design fee is 50,000 yuan, which can be paid in one lump sum after the contract is signed, and the project payment can be deducted EXW CNY: Main building 318,000 Main building + platform 368,000 FOB CNY: Main building 358,000 Main building + platform 408,000 1 40-foot standard container (provisional estimate) Estimated labor on site: 30-45 days/building for 5 workers	

1. The FOB price includes the packing fee, Shanghai Port
2. The platform includes steel structure platform, ground, railings, stairs (2 meters high), excluding platform columns and foundations.
3. The cost of anti-salt spray corrosion for seaside projects is 20,000 yuan per building
4. The price includes indoor soft decoration and bathroom. If there are special materials, the price will be calculated separately.

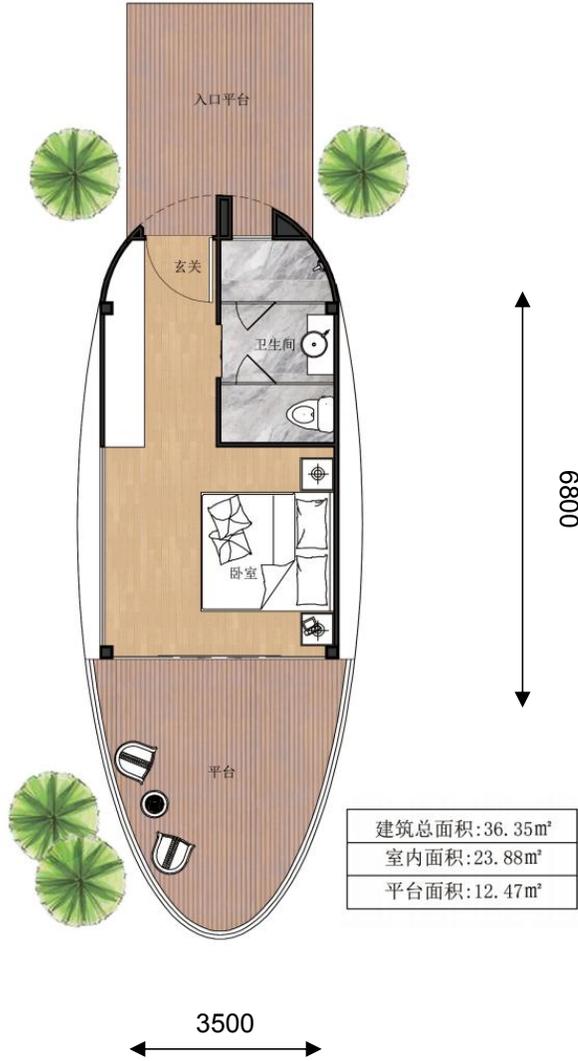

1. The FOB price includes the packing fee, Shanghai Port
2. The platform includes steel structure platform and ground and railings, excluding platform columns and foundations.
3. The cost of anti-salt spray corrosion for seaside projects is 20,000 yuan per building
4. This price includes indoor soft decoration, bathroom, if there are special materials,

product	tree shark	MARK
Basic parameters	King bed room	
	Construction area 36.35m <sup>2</sup> Indoor area 23.88 Platform area 12.47	
main structure	Steel structure Q235 epoxy zinc-rich primer, fluorocarbon topcoat (including steel structure platform)	GB/CE
building construction	Roof: GRG custom-shaped roof, including 150mm rock wool insulation	Non-standard customization
	Ceiling: wood grain aluminum gusset	
	Wall: wood grain transfer thermal insulation sandwich panel, rock wool thermal insulation thickness of 100mm Indoor: wood grain bamboo and wood fiberboard, narrow board vertical paving bathroom: tiled	
	Doors and windows: Broken bridge aluminum alloy double glass, steel entrance door	
	Floor: indoor SPC stone plastic floor; outdoor wood plastic floor; bathroom marble paving	
	Platform railing: 5+5 curved laminated glass fence	
bathroom	Tempered glass partition, toilet, bathroom cabinet, defogging mirror	Kohler / same grade
furniture upholstery	Wardrobe, 1.5m queen bed, bedside table*2, a set of outdoor leisure seats	
Equipment and others	2P duct air conditioner side air outlet	Hisense/same grade
	Intelligent control equipment	HDL
	Electric box, water supply and drainage pipes	GB/local standard
market price	The design fee is 50,000 yuan, which can be paid in one lump sum after the contract is signed, and the project payment can be deducted EXW CNY: Main building 362,000 Main building + platform 398,000 FOB CNY: Main building 392,000 Main building + platform 428,000 1 40-foot standard container (provisional estimate) Estimated labor on site: 5 workers 20-30 days/building	